



Crossover Tube Assembly Shown In Articulation Mode



Snap Pin Used When Switching Between Transport & Articulation Mode



UHMW Wear Plate On Rear Axle

FEATURES

- Eliminate the need for saddle tanks
- Telescoping tongue speeds hook-up with 1 1/8" draw bar pin
- Less filling means you can cover more acres per day with the same planter
- Save valuable time in the spring - Place all of your fertilizer beside the row for optimum root uptake
- 120" wheel tread standard, other widths optional
- Black frame with white tank and wheels.
- Depending on tire selection up to 27" ground clearance
- Axles pivot on greasable 5th wheels
- Built rugged for today's farm operations
- Allows you to fill your planter or toolbar on the go



- Use for herbicide, fertilizer or insecticide application
- All wheel steer so rear tires follow front tire tracks for tight turning radius
- Easy to pull and maneuver
- Use all season long during planting, side dressing, strip-till, or cultivating
- 8 bolt 6000 lb. hubs 3 spindles
- Front axle also pivots horizontally to relieve stress
- Tire options (Less soil compaction with wide foot print):

Row Spacing	Axle Spacing	Spacer
20" x 6 Rows	140"	10"
22" x 6 Rows	132"	6"
30" x 4 Rows	120"	None
36" x 4 Rows	144"	12"
40" x 4 Rows	160"	20"

1000 gallon trailer:
 - 12.5 L x 15 8-ply
 - 13.5 L x 16.1 6-ply

1600 gallon trailer:
 - 17.5 L x 24 10-ply
 - 12.5 L x 60 14-ply

2000 gallon trailer:
 - 19.5 L x 24 10-ply

CALL FOR OPTIONS AND PRICING

FM 3034



agspray.com

PATRIOT PATHFINDER

Bakersfield, CA
877.724.2236

Columbus, NE
800.274.1025

Dothan, AL
800.227.4098

Fargo, ND
800.373.4084

Hopkinsville, KY
800.637.7172

Mankato, MN
800.722.9376

Newton, KS
800.394.7662


Pasco, WA
800.634.2026

Tempe, AZ
877.974.7166

	1000 Gal Trailer	1600 Gal Trailer	2000 Gal Trailer			
<u>Tank Colors</u> White with Black Trailer or Yellow with Green Trailer	1010 Gal Fully Drainable Leg Tank	1610 Gal Fully Drainable Leg Tank	1610 Gal Fully Drainable Leg Tank & 400 Gal Elliptical Tank			
Tire sizes	12.5 x 15 8 Ply Implement Tire	17.5L x 24 10 Ply	19.5L x 24 10 Ply			
	13.5 x 16.1 6 Ply	12.5 x 60 14 Ply 320/85R38 (metric equivalent)				
Rim Bolt Hole Pattern	6 bolt on 6" Circle	8 bolt on 8" circle				
Spindles	1 3/4" 3,500 lb	3" 6,000 lb				
Weight Rating on Trailer	14,000 lb	24,000 lb				
	Row Spacing	Axle Spacing	Spacer	Row Spacing	Axle Spacing	Spacer
	20" x 6 Rows	140"	10"	36" x 4 Rows	144"	12"
	22" x 6 Rows	132" Trailer offset 11"	6"	40" x 4 Rows	160"	20"
	30" x 4 Rows	120"	None			


1000 GAL DIMENSIONS CHART

Tire Size	Tire Height	Tire Width	Dim A	Dim B	Dim C	Dim D
12.5 x 15 8 Ply	32"	12.4"	275"	27"	16"	97"
3.5 x 16.1 6 Ply	41"	13.5"	279"	31"	20.5"	101"

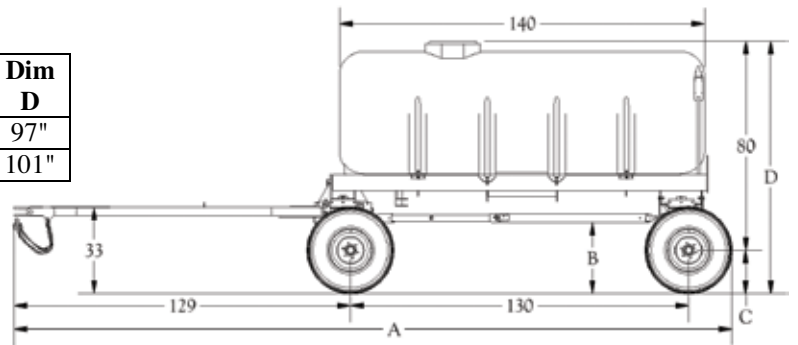

1600 GAL DIMENSIONS CHART

Tire Size	Tire Height	Tire Width	Dim A	Dim B	Dim C	Dim D
17.5L x 24 8 Ply	49"	17"	281"	27"	24.5"	103"
12.5 x 60 14 Ply 320/85R38(metric)	58.8"	12.6"	285"	31"	30"	107"

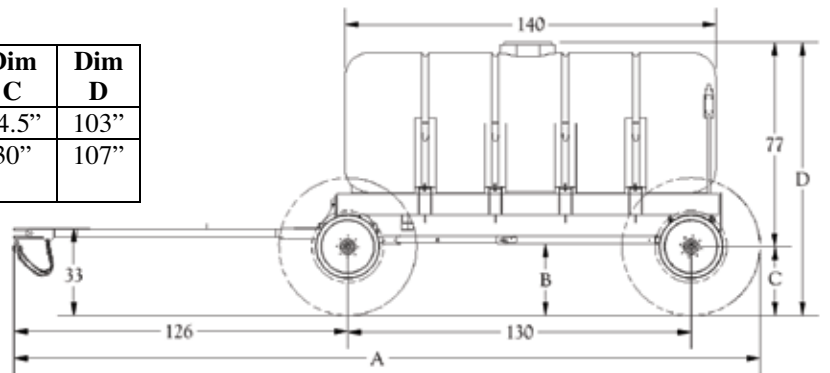

2000 GAL DIMENSIONS CHART

Tire Size	Tire Height	Tire Width	Dim A	Dim B	Dim C	Dim D
19.5L x 24 10 Ply	52"	19"	327"	27"	26"	103"

